

EPON Multi-service  
Broadband Access Home  
Gateway Unit(HGU)

# E1810 Series



## Product Overview

STEC E1810 Series is a smart HGU with integrated wireless, VoIP and CATV function.

It is oriented for the integrated multi-service network in telecom operator network.

STEC E1810 Series is complied with the international standard IEEE802.3ah and PRC Communication Industry Standard (YD/T 1475-2006) and China Telecom EPON Technical Requirement CTC.

E1810 series includes 6 models: E1811-G, E1814-F, E1814-GV, E1814-GV-Q, E1814-GVC-T and E1812-FC-T.

## Product Characteristics

### Excellent Access Capacity

It supports the PON transmission rate of downlink 1.25Gbps/ uplink 1.25Gbps. Connected with STEC OLT, it can realize 1:64 splitting ratio. The covering radius of the network can reach to 20km.

### Secure Service Carrying Ability

For ensuring the secure service carrying ability of ONU, STEC has developed techniques including VLAN, STP, port isolation, ACL, QoS and Broadcast Storm Control.

### High Service Control Capability

It supports DBA and Rate-Limit. It supports advanced dynamic bandwidth distribution and accurate bandwidth limit, which enables users to share 1.25Gbps bandwidth resource appropriately. It also supports QOS function, which guarantees a reliable service quality and service priority.

### Rich OAM Function

It supports the standard OAM defined by China Telecom CTC2.1/3.0, including configuration, alarm, performance monitoring, fault isolation and security management, and it also supports private OAM defined by STEC.

### Complete Interaction Capacity

It is complied with IEEE802.3ah and relevant requirements for PRC Community Industry Standard (YD/T 1475-2006) and China Telecom CTC2.1/3.0.

### Advanced Energy-saving Technique

It supports the "GreenTouch" architecture and "Smart@CHIP".



Support 1.25Gbps uplink/downlink bandwidth



Efficient bandwidth usage and Ethernet services



The splitting ratio ups to 1:64

# Model Lists

## E1811-G

EPON Multi-service Broadband Access Home Gateway Unit(HGU)



- 1 SC/UPC
- 1 GE TX
- 300Mbps Wireless

## E1812-FC-T

EPON Multi-service Broadband Access Home Gateway Unit(HGU)



- 1 SC/ APC
- 1 GE + 1 FE TX
- 1 RF port
- 300Mbps wireless

## E1814-F

EPON Multi-service Broadband Access Home Gateway Unit(HGU)



- 1 SC/UPC
- 1 GE + 3 FE TX
- 300Mbps Wireless

## E1814-GV

EPON Multi-service Broadband Access Home Gateway Unit(HGU)



- 1 SC/UPC
- 4 GE TX
- 300Mbps wireless
- 2 POTS

## E1814-GVC-T

EPON Multi-service Broadband Access Home Gateway Unit(HGU)



- 1 SC/APC
- 4 GE TX
- 1 RF port
- 300Mbps wireless
- 2 POTS


## E1814-GV-Q

EPON Multi-service Broadband Access Home Gateway Unit(HGU)



- 1 SC/UPC
- 4 GE TX
- 1200Mbps wireless
- 2 POTS

# Application Diagram

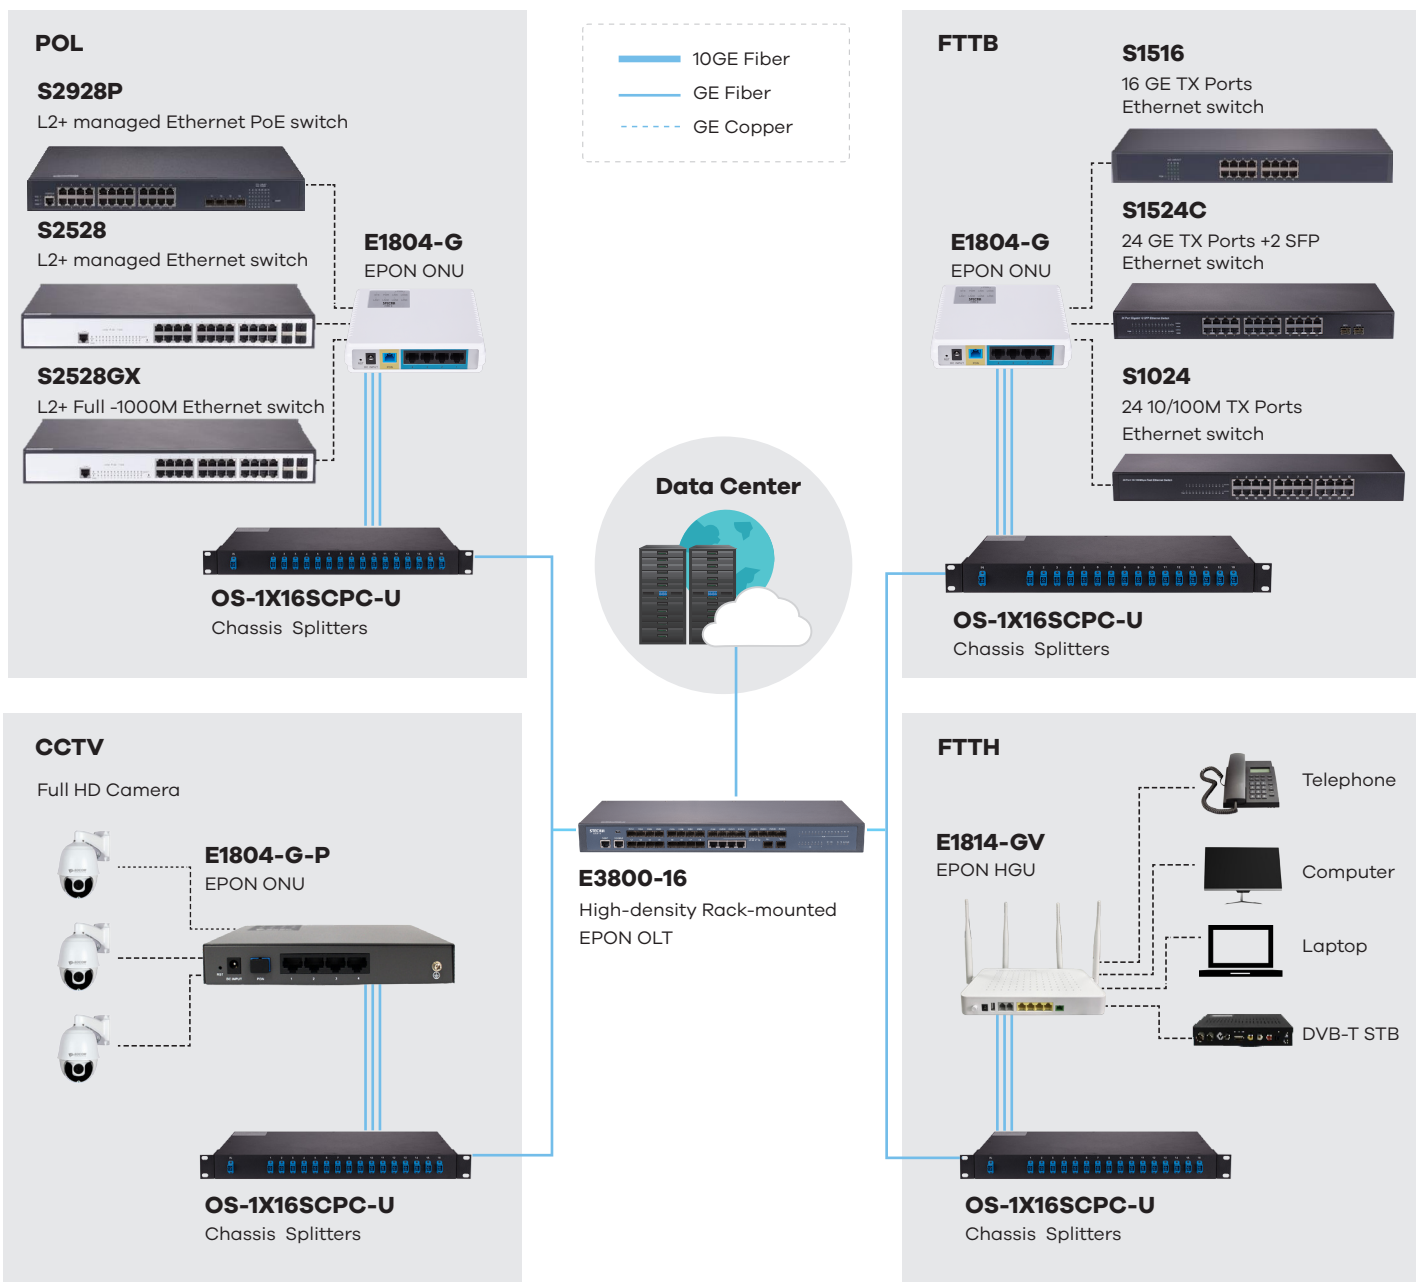

## System Performance

Item	E1811-G	E1812-FC-T	E1814-F
<b>Service interface</b>			
PON ports	1 SC/UPC	1 SC/APC	1 SC/UPC
UNI ports	1 GE TX	1 GE + 1 FE TX + 1 RF	1 GE +3 FE TX
WIFI	300Mbps	300Mbps	300Mbps
Optical power	TX power	0~4dBm	0~4dBm
	RX sensitive	<-27dBm	<-27dBm
<b>Power supply</b>			
AC adaptor	Input: 100-240V AC Output: 12V/0.5A	Input: 100-240V AC Output: 12V/1A	Input: 100-240V AC Output: 12V/1A
Max. consumption (W)	5	10	8
<b>Appearance</b>			
Chassis	Dimensions (WxDxH mm)	117 x 87 x 29	140 x 105 x 30
	Weight(Kg)(empty)	0.1	0.2
Package	Dimensions (WxDxH mm)	218 x 142 x 46	277 x 176 x 38
	Weight (Kg)	0.3	0.4
<b>Environmental Specifications</b>			
Operating	Temperature	-0℃ -45℃	
	Humidity	10%~85% (non-condensing )	
Storage	Temperature	-40℃ -85℃	
	Humidity	5%-95% (non-condensing )	
<b>System capacity</b>			
Accessories	Power adaptor		

## System Performance

Item	E1814-GV	E1814-GV-Q	E1814-VC-T
<b>Service interface</b>			
PON ports	1 SC/UPC	1 SC/UPC	1 SC/APC
UNI ports	4 GE TX	4 GE TX	4 GE TX + 1 RF
WIFI	300Mbps	1200Mbps	300Mbps
Voice	2	2	2
USB	1	1	1
Optical power	TX power	0~4dBm	0~4dBm
	RX sensitive	<-27dBm	<-27dBm
<b>Power supply</b>			
AC adaptor	Input: 100-240V AC Output: 12V/1.5A	Input: 100-240V AC Output: 12V/1.5A	Input: 100-240V AC Output: 12V/1.5A
Max. consumption (W)	15	15	15
<b>Appearance</b>			
Chassis	Dimensions (WxDxH mm)	230 x 140 x 34.9	230 x 140 x 34.9
	Weight(Kg)(empty)	0.4	0.5
Package	Dimensions (WxDxH mm)	325 x 255 x 48	325 x 255 x 48
	Weight (Kg)	0.6	0.7
<b>Environmental Specifications</b>			
Operating	Temperature	-0 C -45 C	
	Humidity	10%~85% (non-condensing )	
Storage	Temperature	-40 C -85 C	
	Humidity	5%~95% (non-condensing )	
<b>System capacity</b>			
Accessories	Power adaptor		

## Ordering Information

<b>Model</b>	
E1811-G	FTTH/O ONU, 1 EPON port (SC/UPC), 1 GE TX port, internal dual antenna(300M WiFi), plastic hull, DC12V/0.5A, external adaptor
E1814-F	FTTH/O ONU, 1 EPON port (SC/UPC), 1 GE + 3 FE TX ports, external dual antenna(300M WiFi), plastic hull, DC12V/1A, external adaptor
E1812-FC-T	FTTH/O ONU, 1 EPON port (SC/APC), 1 GE +1 FE TX ports, 1 RF(British system), external dual antenna(300M WiFi), plastic hull, DC12V/1A, external adaptor
E1814-GV	FTTH/O ONU, 1 EPON port (SC/UPC), 4 GE TX ports, 2 POTS, external dual antenna(300M WiFi), plastic hull, DC12V/1.5A, external adaptor
E1814-GV-Q	FTTH/O ONU, 1 EPON port (SC/UPC), 4 GE TX ports, 2 POTS, external quadruple antenna(1200M WiFi), plastic hull, DC12V/1.5A, external adaptor
E1814-GVC-T	FTTH/O ONU, 1 EPON port (SC/APC), 4 GE TX ports, 2 POTS, 1 RF(British system), external dual antenna(300M WiFi), plastic hull, DC12V/1.5A, external adaptor

# Technical Specifications

## Standards

- IEEE 802.3ah
- PRC Community Industry Standard (YD/T 1475-2006);
- IEEE 802.1D, Spanning Tree
- IEEE 802.1Q, VLAN
- IEEE 802.1w, RSTP
- ITU-T Y.1291

## VLAN

- 4K VLAN
- Port based VLAN
- IEEE 802.1Q VLAN
- Tag/Transparent/Aggregation
- /Trunk/Translation mode VLAN
- CTC2.1/3.0 defined VLAN

## IP Service

- DHCP server/client
- Routing/Bridging/Hybrid mode
- DNS, DDNS
- PPPoE
- NAT/NAPT

## EPON Service

- AES128 algorithm encryption
- MAC/Loid/Hybrid authentication

## QoS

- Backpressure flow control (half-duplex)
- IEEE 802.3x flow control (full duplex)
- Against Head of Line mechanism
- IEEE 802.1p, CoS
- Four priority queues on each port
- WR, SP and FIFO queue schedule algorithms
- Port rate limit
- SLA and DBA

## Management

- Management modes including CLI, HTTP, SNMP, TR069 and TELNET
- Software upgrade through TFTP and WEB, OMCI, etc.
- Local or server syslog

## Voice Service

- SIP, H.248, T.38 FAX
- Three-way calling
- Call waiting
- Hot-line calling

## Network Security

- MAC address number limit
- MAC filter
- Port protect

## Multicast

- IGMP-Snooping
- CTC defined dynamic multicast function
- MLD-Snooping
- Multicast group limitation
- Multicast fast-leave

## Reliability

- Loop detection
- Dying-Gasp
- TX/RX optical power alarm

## Wireless

- 802.11b/g/n
- 802.11 ac(P1704-4GV-22A)
- 2x2 MIMO
- Multi SSID
- SSID encryption
- Configurable Channel