



# G1810 Series

GPON Multi-service  
Broadband Access Home  
Gateway Unit(HGU)



## Product Overview

STEC G1810 Series is a smart HGU with integrated wireless, VoIP and CATV function.

STEC G1810 Series is oriented for the integrated multi-service network in telecom operator network.

STEC G1810 Series is complied with the international standard ITU-T G.984/988 and PRC Communication Industry Standard GPON ONU in Access Technology Requirements and China Telecom GPON Technical Requirement CTC2.0.

G1810 Series includes 6 models:

G1811-G,  
G1812-FC-T,  
G1814-F,  
G1814-GV,  
G1814-GV-Q,  
G1814-GVC-T.

## Product Characteristics

### Excellent Access Capacity

G1810 Series supports the PON transmission rate of downlink 2.5Gbp/ uplink 1.25Gbps. Connected with STEC OLTs, it can realize 1 : 128 splitting ratio. The covering radius of the network can reach to 20km.

### Secure Service Carrying Ability

For ensuring the secure service carrying ability of ONU, STEC has developed techniques including VLAN, STP, port isolation, ACL, QoS and Broadcast Storm Control.

### High Service Control Capability

G1810 Series supports DBA and Rate-Limit. It supports advanced dynamic bandwidth distribution and accurate bandwidth limit, which enables users to share 2.5Gbps bandwidth resource appropriately. It also supports QoS function, which guarantees a reliable service quality and service priority.

### Rich OMCI Function

G1810 Series supports the standard OMCI defined by ITU-T, including configuration, alarm, performance monitoring, fault isolation and security management, and it also supports private OMCI defined by STEC.

### Complete Interaction Capacity

G1810 Series is complied with ITU-T G.984/988 and relevant requirements for PRC Community Industry Standard GPON ONU in Access Technology Requirements and China Telecom GPON Technical Requirement CTC2.0.

### Advanced Energy-saving Technique

G1810 Series supports the "GreenTouch" architecture and "Smart@CHIP".



Support 1.25Gbps  
uplink/downlink  
bandwidth



Efficient bandwidth  
usage and Ethernet  
services



The splitting ratio  
ups to 1:64

# Model Lists

## G1811-G

GPON Multi-service Broadband Access Home Gateway Unit(HGU)



- 1 SC/UPC
- 1 GE TX
- 300Mbps Wireless

## G1812-FC-T

GPON Multi-service Broadband Access Home Gateway Unit(HGU)



- 1 SC/ APC
- 1 GE + 1 FE TX
- 1 RF port
- 300Mbps wireless

## G1814-F

GPON Multi-service Broadband Access Home Gateway Unit(HGU)



- 1 SC/UPC
- 1 GE + 3 FE TX
- 300Mbps Wireless

## G1814-GV

GPON Multi-service Broadband Access Home Gateway Unit(HGU)



- 1 SC/UPC
- 4 GE TX
- 300Mbps wireless
- 2 POTS

## G1814-GVC-T


GPON Multi-service Broadband Access Home Gateway Unit(HGU)



- 1 SC/APC
- 4 GE TX
- 1 RF port
- 300Mbps wireless
- 2 POTS


## G1814-GV-Q

GPON Multi-service Broadband Access Home Gateway Unit(HGU)



- 1 SC/UPC
- 4 GE TX
- 1200Mbps wireless
- 2 POTS

# Application Diagram

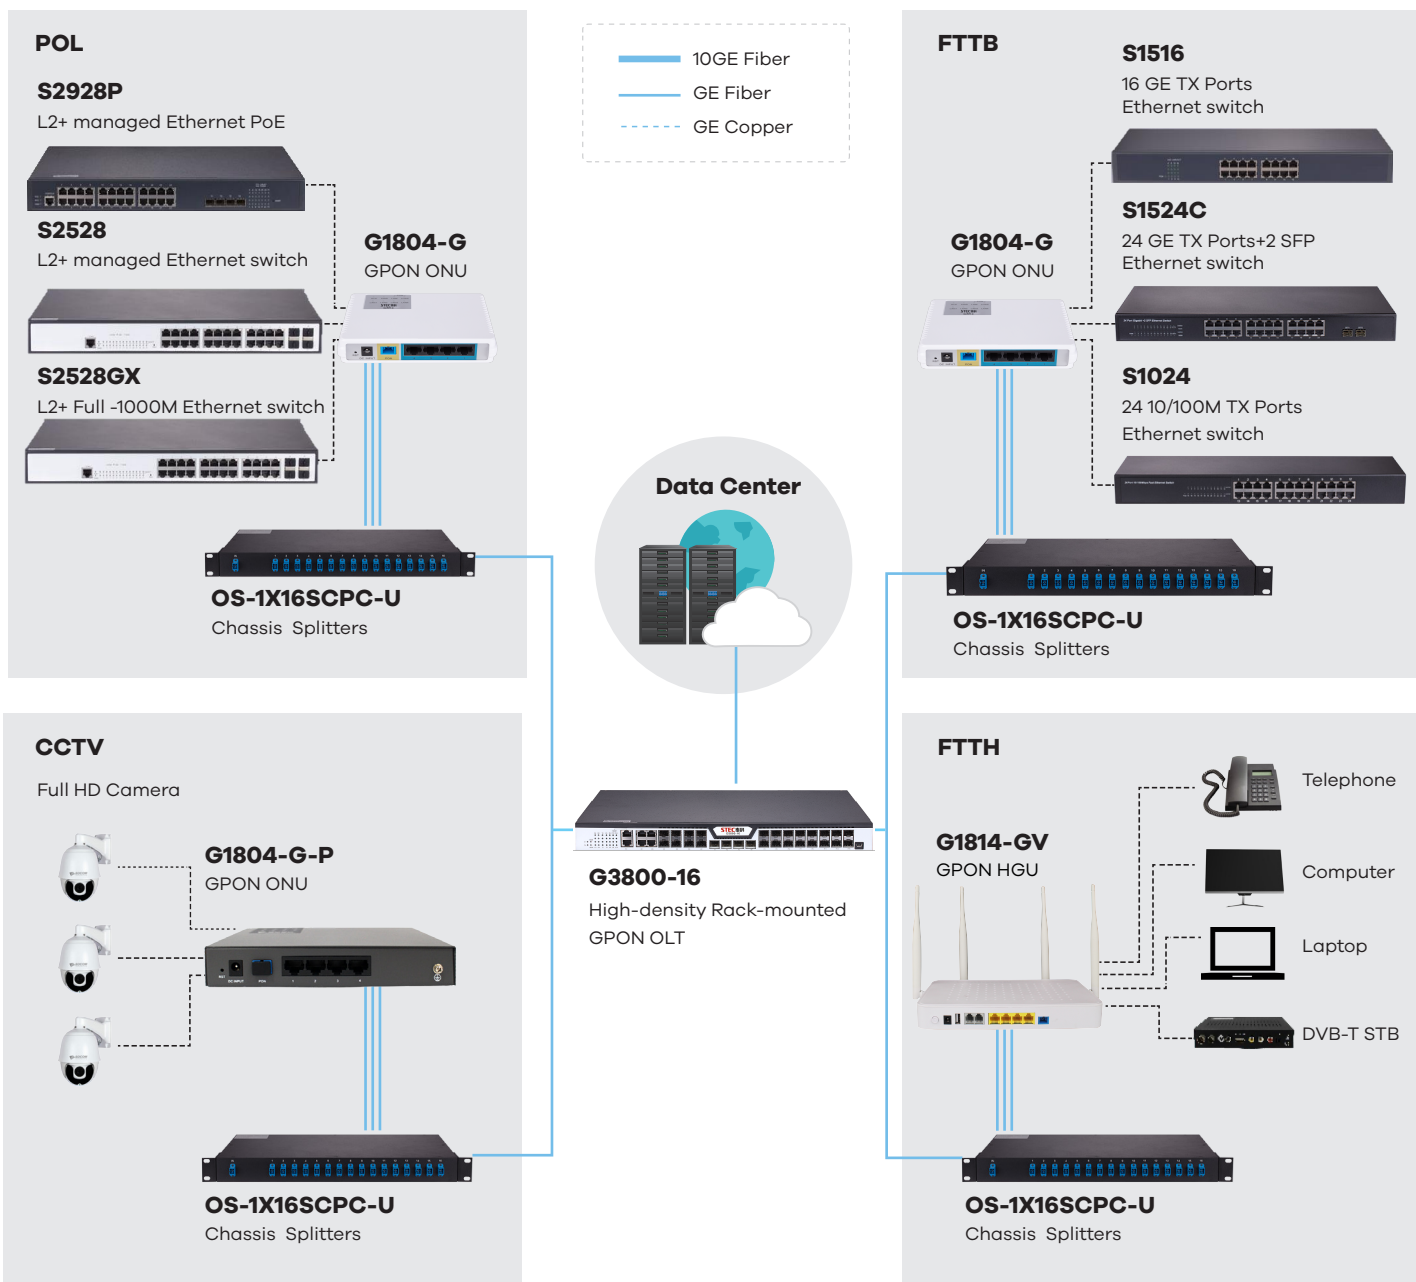

# System Performance

Item	G1811-G	G1812-FC-T	G1814-F
<b>Service interface</b>			
PON ports	1 SC/UPC	1 SC/APC	1 SC/UPC
UNI ports	1 GE TX	1 GE + 1 FE TX + 1 RF	1 GE +3 FE TX
WIFI	300Mbps	300Mbps	300Mbps
Optical power	TX power	0.5-5dBm	0.5-5dBm
	RX sensitive	<-28dBm	<-28dBm
<b>Power supply</b>			
AC adaptor	Input: 100-240V AC Output: 12V/0.5A	Input: 100-240V AC Output: 12V/1A	Input: 100-240V AC Output: 12V/1A
Max. consumption (W)	5	10	8
<b>Appearance</b>			
Chassis	Dimensions (WxDxH mm)	117 x 87 x 29	140 x 105 x 30
	Weight(Kg)(empty)	0.1	0.2
Package	Dimensions (WxDxH mm)	218 x 142 x 46	277 x 176 x 38
	Weight (Kg)	0.3	0.3
<b>Environmental Specifications</b>			
Operating	Temperature	-0 C -45 C	
	Humidity	10%-85% (non-condensing )	
Storage	Temperature	-40 C -85 C	
	Humidity	5%-95% (non-condensing )	
<b>System capacity</b>			
Accessories	Power adaptor		

## System Performance

Item	G1814-GV	G1814-GV - Q	G1814-GVC-T
<b>Service interface</b>			
PON ports	1 SC/UPC	1 SC/UPC	1 SC/APC
UNI ports	4 GE TX	4 GE TX	4 GE TX + 1 RF
WIFI	300Mbps	1200Mbps	300Mbps
Voice	2	2	2
USB	1	1	1
Optical power	TX power	0.5~5dBm	0.5~5dBm
	RX sensitive	<-28dBm	<-28dBm
<b>Power supply</b>			
AC adaptor	Input: 100-240V AC Output: 12V/1.5A	Input: 100-240V AC Output: 12V/1.5A	Input: 100-240V AC Output: 12V/1.5A
Max. consumption (W)	15	15	15
<b>Appearance</b>			
Chassis	Dimensions (WxDxH mm)	230 x 140 x 34.9	230 x 140 x 34.9
	Weight(Kg)(empty)	0.4	0.5
Package	Dimensions (WxDxH mm)	325 x 255 x 48	325 x 255 x 48
	Weight (Kg)	0.6	0.7
<b>Environmental Specifications</b>			
Operating	Temperature	-0℃ -45℃	
	Humidity	10%~85% (non-condensing )	
Storage	Temperature	-40℃ -85℃	
	Humidity	5%~95% (non-condensing )	
<b>System capacity</b>			
Accessories	Power adaptor		

# Ordering Information

Model	
G1811-G	FTTH/O ONU, 1 GPON port (SC/UPC), 1 GE TX port, internal dual antenna(300M WiFi), plastic hull, DC12V/0.5A, external adaptor
G1812-FC-T	FTTH/O ONU, 1 GPON port (SC/APC), 1 GE + 1 FE TX ports, 1 RF(British system), external dual antenna(300M WiFi), plastic hull, DC12V/1A, external adaptor
G1814-F	FTTH/O ONU, 1 GPON port (SC/UPC), 1 GE + 3 FE TX ports, external dual antenna(300M WiFi), plastic hull, DC12V/1A, external adaptor
G1814-GV	FTTH/O ONU, 1 GPON port (SC/UPC), 4 GE TX ports, 2 POTS, external dual antenna(300M WiFi), plastic hull, DC12V/1.5A, external adaptor
G1814-GV-Q	FTTH/O ONU, 1 GPON port (SC/UPC), 4 GE TX ports, 2 POTS, external quadruple antenna(1200M WiFi), plastic hull, DC12V/1.5A, external adaptor
G1814-GVC-T	FTTH/O ONU, 1 GPON port (SC/APC), 4 GE TX ports, 2 POTS, 1 RF(British system), external dual antenna(300M WiFi), plastic hull, DC12V/1.5A, external adaptor

## Technical Specifications

### Standards

- ITU-T G.984/G.988
- PRC Community Industry Standard GPON ONU in Access Technology Requirements
- IEEE 802.1D, Spanning Tree
- IEEE 802.1Q, VLAN
- IEEE 802.1w, RSTP
- ITU-T Y.1291

### VLAN

- 4K VLAN
- Port based VLAN
- IEEE 802.1Q VLAN
- Tag/Transparent/Aggregation /Trunk/Translation mode VLAN
- CTC2.0 defined VLAN

### IP Service

- DHCP server/client
- Routing/Bridging/Hybrid mode
- DNS, DDNS
- PPPOE
- NAT/NAPT

### GPON Service

- AES128 algorithm encryption
- MAC/Loid/Hybrid authentication

### QoS

- Backpressure flow control (half-duplex)
- IEEE 802.3x flow control (full duplex)
- Against Head of Line mechanism
- IEEE 802.1p, CoS
- Four priority queues on each port
- WR, SP and FIFO queue schedule algorithms
- Port rate limit
- SLA and DBA

### Reliability

- Management modes including CLI, HTTP, SNMP, TR069 and TELNET
- Software upgrade through TFTP and WEB, OMCI, etc.
- Local or server syslog

### Voice Service

- SIP, H.248, T.38 FAX
- Three-way calling
- Call waiting
- Hot-line calling

### Network Security

- MAC address number limit
- MAC filter
- Port protect

### Multicast

- IGMP-Snooping
- CTC defined dynamic multicast function
- MLD-Snooping
- Multicast group limitation
- Multicast fast-leave

### Reliability

- Loop detection
- Dying-Gasp
- TX/RX optical power alarm

### Wireless

- 802.11 b/g/n
- 802.11 ac(GP1704-4GV-22A)
- 2x2 MIMO
- Multi SSID
- SSID encryption
- Wireless channel (configurable)

Copyright © Shenzhen SDG Telecom Equipment Co., LTD.2020. All Rights Reserved.

This document is STEC Public Information. STEC reserves the right to alter, update and otherwise change the information contained in the document from time to time.

